


M-Touch



Martin M-Touch uses M-PC as software that will run on a Windows PC and can be downloaded [here](#).

Martin M-Touch is a powerful yet simple control surface for the Martin M-Series controllers, the most affordable professional lighting solutions on the market. Fully compatible with all M-Series consoles and M-PC software, Martin M-Touch is a plug-and-play solution with an innovative control surface like no other lighting console. 14 touch faders allow control of playbacks and fixture parameters while 20 velocity-controlled pads allow for new types of effects. Additional programming buttons such as Record, Edit, Update, Load and Clear are accessible directly from the M-Touch control panel. Martin M-Touch comes with one DMX 512 Universe for direct control of any compatible DMX device.

GALLERY

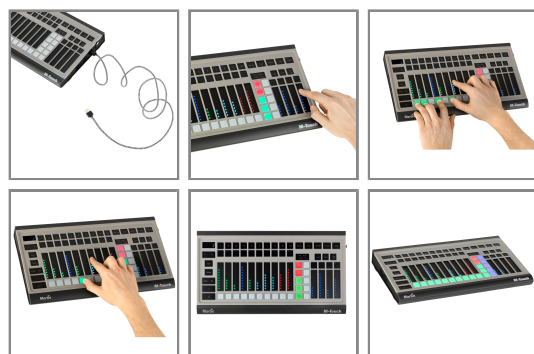

Truly affordable console surface for both smaller applications and professional use

Rugged aluminum design for durability

The most powerful controller of its class with a full 512 DMX channels, expandable to 65,000 channels

FEATURES

- Truly affordable console surface for both smaller applications and professional use
- Rugged aluminum design for durability
- The most powerful controller of its class with a full 512 DMX channels, expandable to 65,000 channels

TECHNICAL SPECIFICATIONS

Physical

Length: 394 mm (15.5 in.)

Width: 218.5 mm (8.6 in.)

Height: 46.5 mm (1.8 in.)

Weight: 1.5 kg (3.3 lbs.)

Control/User Interface

Bank Navigation Up/Down with numerical display

Main Go section: Snap, Release, Pause and Go buttons

Command Buttons: Record, Edit, Update, Load, Clear

Multifunction Mode Select button

Fixture Selection buttons: Last, Next, Highlight

4 x Parameter Select buttons

4 x Parameter Adjust touch faders

10 x Function velocity pads

Playback

10 x Playback touch faders with 3 buttons

(2 x touch pad, 1 x velocity pad)

System integration

Unlocks 1 x DMX universe when connected to M-PC™

Construction

Housing: Aluminum, steel, plastic

Mounting: VESA 75x75, 100x100

Security: K-Lock locking slot

IP Rating: IP20

Connections

DMX data link: 1 x 5-pin locking XLR

Windows PC: USB 2.0

Electrical

Power source: 5 VDC over USB

Maximum current: 500 mA

Thermal

Operating temperature: 0° – 50° C (32° – 122° F)

Included Items

USB cable 1.5m (4.9 ft.)

Accessories

Martin™ M-Sync SMPTE USB: P/N 90703020

M-PC 2U / M-DMX: P/N 90737070

Martin One-Key with M-PC Pro-64 /LJ-4 License: P/N 70758460

Rackmount bracket: P/N 91611690

Related Items

M-Series Submaster Module: P/N 90732170

M-Series Playback II Module: P/N 90732190

Martin™ M-Play: P/N 90737030

Martin™ M-PC Pro 64 / LightJockey 4 Controller Kit: P/N 90737060

Ordering Information

Martin M-Touch: P/N 90737040

